


Schematic

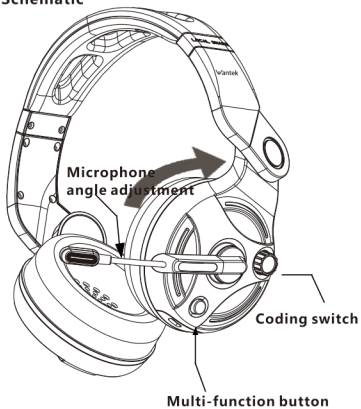

Operation instructions:

1. Long press the multi-function button (MFB), the headset is turned on, and the headset enters pairing after turning on. The pairing name: T2L, turn on the Bluetooth of the mobile phone and click: T2L, click the pairing link to link the headset.

Music control:

1. MFB controls music play/pause, call answering/hanging up Rotate the encoder switch clockwise to increase the control volume, and turn the encoder switch counterclockwise to reduce the volume.
2. Press the rotary encoder switch clockwise to control the next song, and press the rotary encoder switch counterclockwise to control the previous song.
3. Long press the encoding switch and let go after hearing the prompt tone, start the voice assistant, and click exit.

Lighting control:

1. Double-click the coding switch to control the turn off and turn on of the light Headphone charging
2. During charging, the LED is on, and the LED is off when fully charged
- 3.3 Click MFB phone last digit to redial

Microphone mute control

1. The microphone boom is lifted to the top, the microphone is muted (the other party cannot hear the sound), microphone boom down , the microphone mute is cancelled, and the microphone can be used normally.
Headphone cable use
2. It is recommended to use the headphone cable after it is turned off, so that the headphones will not consume power.

1. Turn on and off the low-latency mode: Double-click the MFB to turn on or off the low-latency function.

Technical specifications:

Bluetooth version: Bluetooth 5.2
 Working range: 10 meters without barriers
 Frequency range: 2.4-2.48GHZ
 Bluetooth protocol: A2DP, AVRCP, HSP, HFP
 Drive unit: 57MM/16Ω
 Frequency response: 20HZ-20KHZ
 Sensitivity: 112DB
 Rated power: 20MW+20MW
 Music/talk time: about 30 hours when the lights are off, at moderate volume
 Approximately 15 hours with lights on, moderate volume
 Charging time: about 2 hours
 Input voltage/current: 5V/1A
 Working environment: -10°C-50°C